


In-Wall *Rear Projection* SMART Board™ Interactive Whiteboard

Specifications – Model 1910

Physical Specifications

| | |
|-----------------------------------|---|
| Size | 72 1/4" W x 55 1/4" H x 2 5/8" D (183.5 cm x 140.3 cm x 6.7 cm) |
| Interactive Whiteboard | |
| Pen Tray with Keyboard Bracket | 38 1/4" W x 9 5/8" H x 4 5/8" D (97.2 cm x 24.4 cm x 11.8 cm) |
| Active Screen Area | 67 1/4" W x 50 3/8" H (170.8 cm x 128.0 cm) 84" (213.4 cm) diagonal |
| Installation Information | 68 5/8" W x 54 3/8" H (174.3 cm x 138.1 cm) The interactive whiteboard must be mounted between two studs that run from floor to ceiling. |
| Weight | 105 lb. (47.6 kg) |
| Shipping Weight | 160 lb. (72.6 kg) |
| Shipping Size | 77" W x 65" H x 26" D (195.6 cm x 165.1 cm x 66.0 cm) |

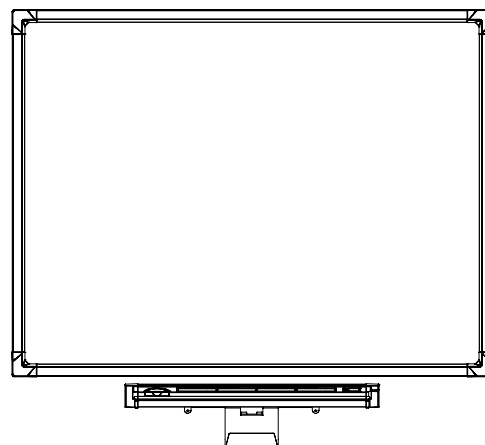

All dimensions +/- 1/8" (3.2 mm). All weights +/- 2 lb. (0.9 kg).

Standard Features

| | |
|--------------------------------|---|
| Software | SMART Board software and Notebook™ software. Free software upgrades are available at www.smarttech.com/support/software/index.asp . |
| Pen Tray | Optical sensors in the pen tray detect when a pen or the eraser is lifted from the tray. LED indicators show the active tool. Includes four pens (black, blue, red and green) and one eraser. |
| Keyboard Bracket | Bracket attaches to the wall below the pen tray to hold the wireless keyboard and IR receiver |
| Wireless Keyboard | US English Windows® operating system with built-in trackball (all regions except Japan) |
| Resolution | Touch resolution approximately 2000 x 2000. Supports all projector resolutions up to 1600 x 1200. |
| SMART Super Screen | Bright image with uniform light distribution. Suitable for high ambient lighting, specifically meeting rooms or videoconferencing rooms. |
| Screen Surface Material | Extremely durable, low-reflection (matte) finish reduces glare from overhead lights |
| Digitizing Technology | DViT™ (Digital Vision Touch) technology uses digital cameras to track an object interacting with the display surface |
| Projector | A projector is <i>not</i> included with this model of SMART Board interactive whiteboard. To take advantage of all interactive features, you must integrate a projector. |
| Computer Connection | A 21' 6" (6.6 m) SMART USB adapter cable is included |
| Power Supply | A switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC 4.2A, with a 6' (1.8 m) country-specific power cord |
| Power Requirements | Power consumption is approximately 50 watts |
| Warranty | Two-year limited equipment warranty |

Storage and Operating Specifications

| | |
|------------------|--|
| Storage | -40°F to 95°F (-40°C to 35°C) with up to 95% humidity non-condensing |
| Operation | 41°F to 95°F (5°C to 35°C) with up to 90% humidity non-condensing |

SMART Board Software 9.5 Computer Requirements

Windows Computers Pentium® II 450 MHz processor
128 MB of RAM (256 MB recommended)
136 MB of free hard disk space for minimum installation (511 MB for full installation with Gallery collections)
Windows NT® 4.0 (SP6), Windows 98 operating system or later
Microsoft Internet Explorer® 6.0 or later
Macromedia® Flash® player version 8

NOTE: The AirLiner™ wireless slate requires the Windows 2000 or Windows XP operating system.


Requirements for SMART Video Player Pentium II 450 MHz processor (700 MHz or faster recommended)
Windows 98 operating system or later. Does not run on the Windows NT operating system.
Microsoft® DirectX® technology 8.1 or later

Mac Computers 700 MHz processor (1 GHz or faster recommended)
128 MB of RAM (256 MB recommended)
Mac OS X versions 10.3.9 and 10.4.x
148 MB of free hard disk space for minimum installation (423 MB for full installation with Gallery collections)
Safari™ 1.3.2 or later
SMART Board software version 9.5 supports Intel® processors (Universal Binary)

NOTE: Previous versions of SMART Board software are compatible with earlier versions of the Mac OS X operating system. To download a previous version of SMART Board software, go to www.smarttech.com/support/software/sb_mac_other.asp.

Linux® Computers Pentium II 450 MHz processor
128 MB of RAM (256 MB recommended)
185 MB of free hard disk space for minimum installation (460 MB for full installation with Gallery collections)
Linux kernel version 2.6 or later
X Windows version 11 release 6 (X11R6) or later (must support XRENDER and Xinerama)
glibc 2.3.3 (gcc 3.4.2)
libstdc++6
Gnome 2.8.0+ or KDE® 3.3+ libraries (recommended)
SUSE® 10, Red Hat® Enterprise Linux 4 WS, Fedora™ Core 3, Debian™ 3.1 (Sarge) or Ubuntu 6.06 LTS

Wall Opening

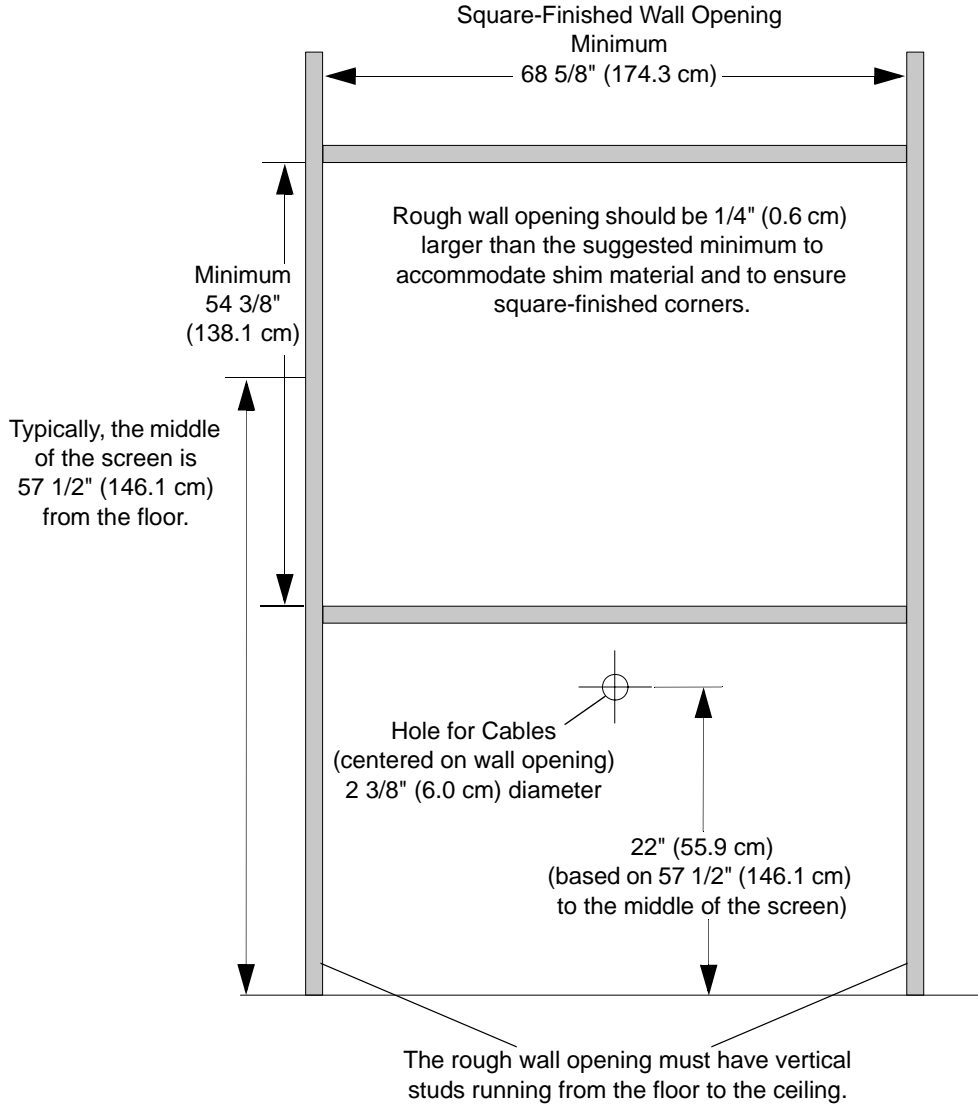

SMART Order Number

WRPSB 1910-DV

In-Wall Rear Projection SMART Board 1910 interactive whiteboard

93-00360

Optional 20' (6.1 m) straight-through DB9F-to-DB9F serial cable. Must be ordered separately for systems that don't support USB connections.

SMART Technologies Inc.

1207 – 11 Avenue SW, Suite 300

Calgary, AB T3C 0M5

CANADA

Phone +1.403.245.0333

Toll Free 1.888.42.SMART (Canada/U.S.)

info@smarttech.com www.smarttech.com

